SATTLER

AVVENI
TABLE

Focus Open 2016 Gold
GERMAN DESIGN AWARD WINNER 2017

Product-information: Aluminium structure with one light head and metal stand. The light head can be taken off and is fully adjustable through a magnetic hinge system.

Design: Ulrich Sattler | Michael Schmidt, Code2design

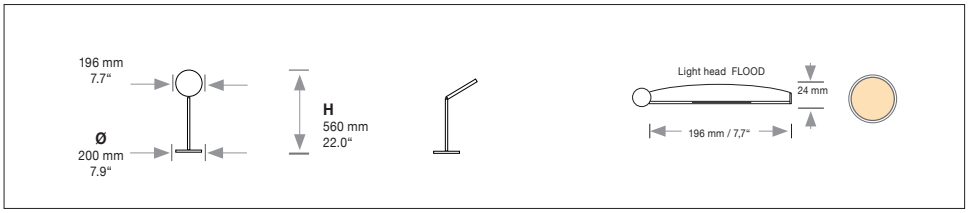

STRUCTURE

Type	H/Ø mm	H/Ø inches	LED Watt	weight kg[2] / lbs[2]
	H 560 / Ø 200	H 22.0 / Ø 7.9“	17 W	2.0 / 4.4

Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
1100.	xx.	xx.	xx.	xx.

Finish 1 Structure

12 white matt RAL 9003 — **14** black matt — **22** aluminium polished — **Standard**

xxxx.	**12**	xx.	xx.	xx.
xxxx.	**14**	xx.	xx.	xx.
xxxx.	**22**	xx.	xx.	xx.

Dimmer

Push button for dimming
CASAMBI Head switch- and dimmable. — **Standard**

xxxx.	xx.	**07**	xx.	xx.
xxxx.	xx.	**08**	xx.	xx.

Power Supply Cable

power supply cable, 2800 mm / 110“ — **90** PVC black — **Standard**

xxxx.	xx.	xx.	**90**	xx.

Mounting Version

power supply: L130 x W55 x 30mm L51.2 x W2.2 x 1.2“

1750 mm 68.9“ — 1000 mm 39.4“

pluggable on the lamp cord included country-specific plug

please tick your plug version, further versions on request.

☐ EURO
☐ UK

. . . .	. .	. .	**90**	**0N**

Order No. STRUCTURE

LIGHT HEAD

Type No.	Finish 2	Finish 3	LED Kelvin	LED Beam angle		
01	xx.	xx.	xx	xx.	xx	xx

Type

Finish 2 Light head outside ring

12 white matt RAL 9003 — **62** (14) black matt — **22** aluminium polished — **Standard**

Finish 2 must be the same as finish 1

xx.	**12**	xx.	xx	xx.	xx	xx
xx.	**62**	xx.	xx	xx.	xx	xx
xx.	**22**	xx.	xx	xx.	xx	xx

Finish 3 Light head top cover

60 silver anodised — **61** gold anodised — **62** black anodised — **Standard**

xx.	xx.	**60**	xx	xx.	xx	xx
xx.	xx.	**61**	xx	xx.	xx	xx
xx.	xx.	**62**	xx	xx.	xx	xx

LED 36V, CRI >95

xx.	xx	xx.	**27**	xx.	xx	xx
xx.	xx	xx.	**30**	xx.	xx	xx
xx.	xx	xx.	**40**	xx.	xx	xx

Extra warm-white 2700 K
Warm-white 3000 K
Neutral-white 4000 K

Beam Angle

FLOOD 17 W | 1344[1] Lumen

xx.	xx	xx.	xx	**99**	**00**	**00**

Metal stand

Ø 200 mm / 7.9“
Colour:
Finish 1, structure white (12) – Stand white (12)
Finish 1, structure black (14) – Stand black (14)
Finish 1, structure polished (22) – Stand black (14)

Order No. LIGHT HEAD FLOOD

. .	. .	. .	. .	. .	**00**	**00**

Input voltage for all external power supply units and canopies is 90-277 VAC 47-63 Hz

Handcrafted in Germany, certified quality
Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08
IP 20 Protective rating
180° Tiltable
360° Rotatable
Light distribution direct
Schutzklasse II Protection class II

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F.
2) Weight of lights without remote technical unit or canopy.